


CRY CYR support rollers

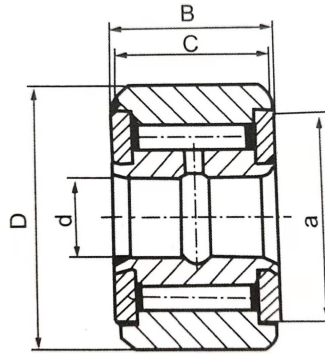

CYR...S YCRS CRY...VUU

select	Inquiry	Shaft Diameter	Bearing Designation	Boundary Dimension			Weight (kg)	
				d	D	B C		
6.35	CYR3/4S	YCRS-12	CRY 12VUU	6.35	19.05	14.288	12.7	0.027
	CYR7/8S	YCRS-14	CRY 14VUU	6.35	22.225	14.288	12.7	0.036
7.938	CYR1S	YCRS-16	CRY 16VUU	7.938	25.4	17.463	15.875	0.068
	CYR1 1/8S	YCRS-18	CRY 18VUU	7.938	28.575	17.463	15.875	0.077
9.525	CYR1 1/4S	YCRS-20	CRY 20VUU	9.525	31.75	20.638	19.05	0.11
	CYR1 3/8S	YCRS-22	CRY 22VUU	9.525	34.925	20.638	19.05	0.136
11.112	CYR1 1/2S	YCRS-24	CRY 24VUU	11.112	38.1	23.813	22.225	0.186
	CYR1 5/8S	YCRS-26	CRY 26VUU	11.112	41.275	23.813	22.225	0.227
12.7	CYR1 3/4S	YCRS-28	CRY 28VUU	12.7	44.45	26.988	25.4	0.29
	CYR1 7/8S	YCRS-30	CRY 30VUU	12.7	47.625	26.988	25.4	0.36
15.875	CYR2S	YCRS-32	CRY 32VUU	15.875	50.8	33.338	31.75	0.476
	CYR2 1/4S	YCRS-36	CRY 36VUU	15.875	57.15	33.338	31.75	0.6

CRY CYR support rollers

19.05	CYR2 1/2S	YCRS-40	CRY 40VUU	19.05	63.5	39.688	38.1	0.82
	CYR 3/4S	YCRS-44	CRY 44VUU	19.05	63.5	39.688	38.1	1.02
25.4	CYR3S	YCRS-48	CRY 48VUU	25.4	76.2	46.04	44.45	1.4
	CYR3 1/4S	YCRS-52	CRY 52VUU	25.4	82.55	46.04	44.45	1.64